



US006648007B1

(12) **United States Patent**
Selby et al.

(10) **Patent No.:** **US 6,648,007 B1**
(45) **Date of Patent:** **Nov. 18, 2003**

(54) **SAFETY HOSE SYSTEM AND A PROCESS FOR MANUFACTURING THEREOF**

5,931,184 A * 8/1999 Armenia et al. 137/312
6,039,066 A * 3/2000 Selby 137/312
6,129,107 A * 10/2000 Jackson 137/312

(75) Inventors: **William J. Selby**, Stoughton; **Ronald A. Selby**, Canton, both of MA (US)

* cited by examiner

(73) Assignee: **Samar Company, INC**, Stoughton, MA (US)

Primary Examiner—George L. Walton
(74) *Attorney, Agent, or Firm*—Steven N. Fox, Esq.

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 186 days.

(57) **ABSTRACT**

(21) Appl. No.: **09/687,566**

A process for manufacturing a safety hose system. In one embodiment, the process of the present invention comprises the steps of positioning the inside hose with the outside hose; inserting first and second pre-mold inserts about the first and second end portions of the inside hose; attaching the first and second connectors to the first and second end portions of the inside hose to form first and second crimped portions, respectively; applying an adhesive to the first and second crimped portions; inserting the first and second crimped portions into the connector inlet portions of the first and second pre-mold inserts, respectively; inserting the drain hose into the drain hose inlet portion of the first pre-mold insert; molding a first end-cap member to the first end portion of the outside hose, the first pre-mold insert, and the drain hose; and molding a second end-cap member to the second end portion of the outside hose and the second pre-mold insert.

(22) Filed: **Oct. 13, 2000**

(51) **Int. Cl.**⁷ **F16L 9/18**; F16L 55/16

(52) **U.S. Cl.** **137/312**; 73/40.5 R; 73/49.1; 138/114; 141/86; 141/88; 222/108; 285/13; 285/123.1


(58) **Field of Search** 137/312; 138/114, 138/104, 113, 145; 73/40.5 R, 46, 49.1; 141/86, 88; 222/108; 285/13, 123.1

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,532,131 A * 10/1970 Lefere 138/114
5,713,387 A * 2/1998 Armenia et al. 137/312

11 Claims, 4 Drawing Sheets

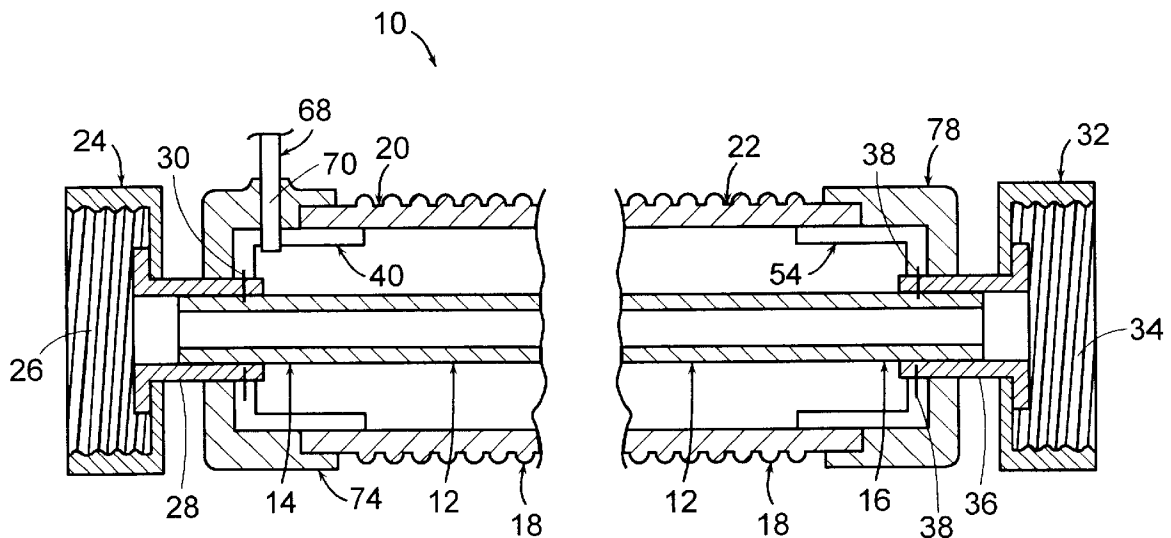

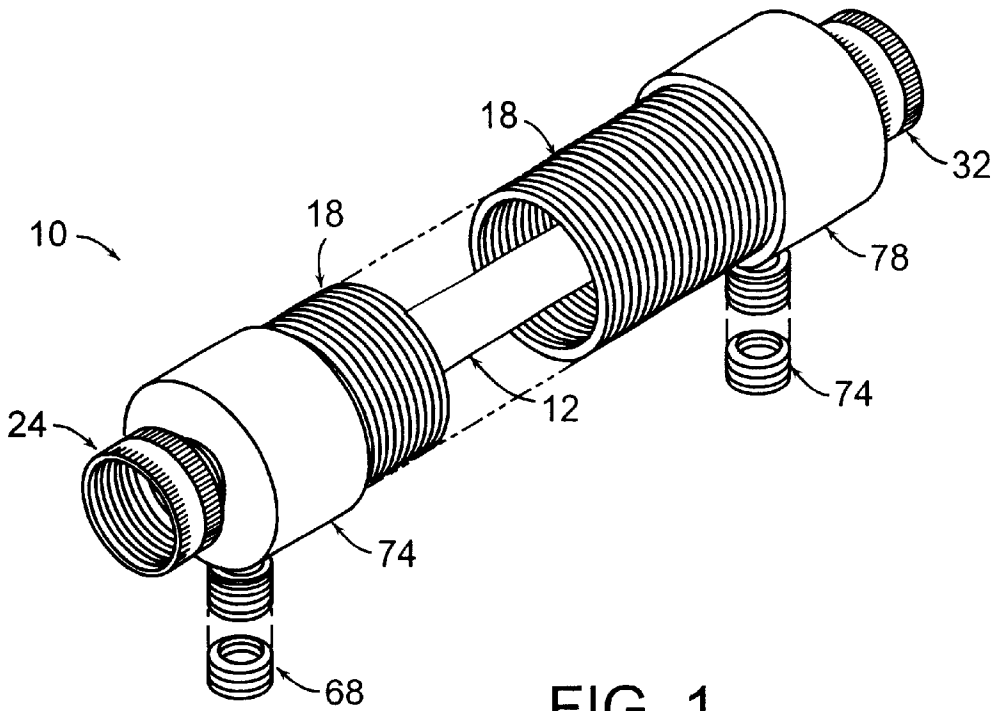


FIG. 1

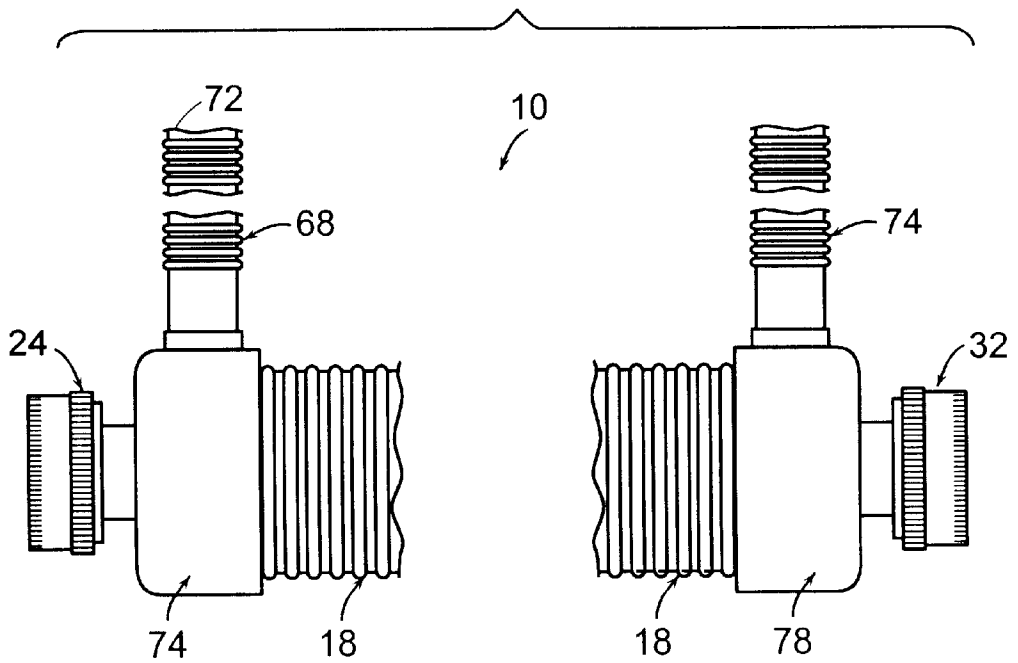


FIG. 2

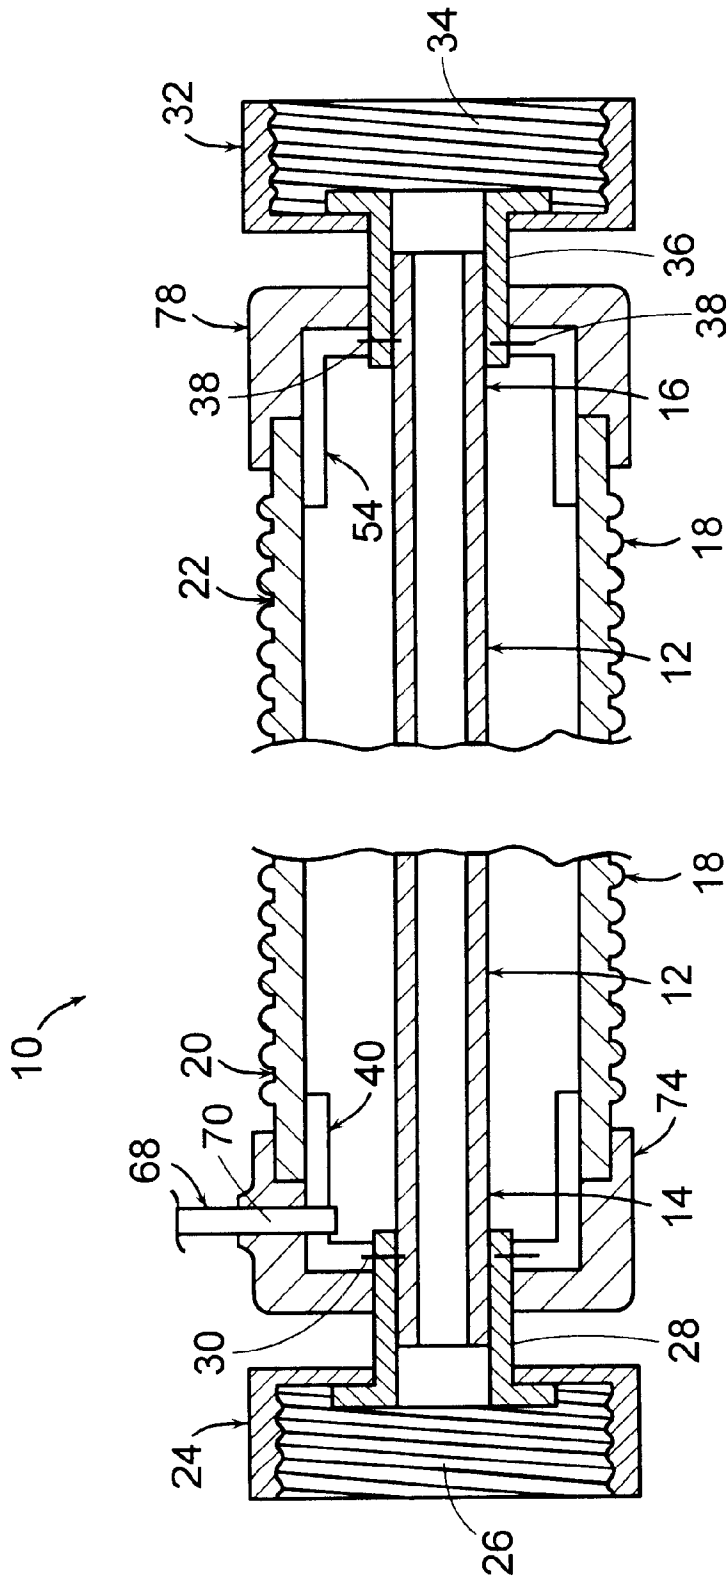


FIG. 3

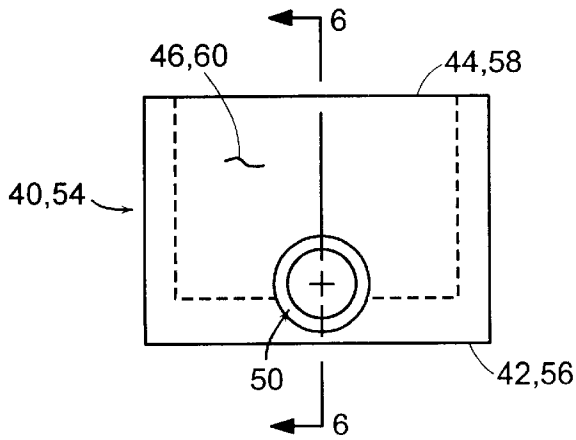


FIG. 4

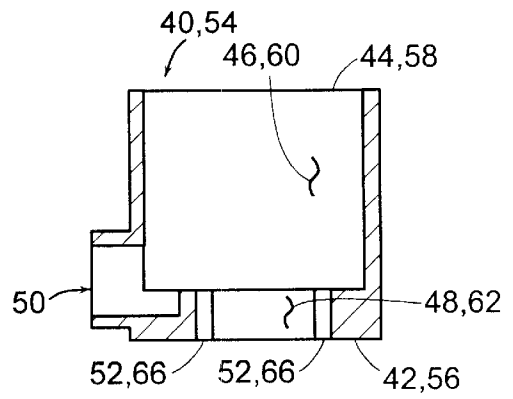


FIG. 6

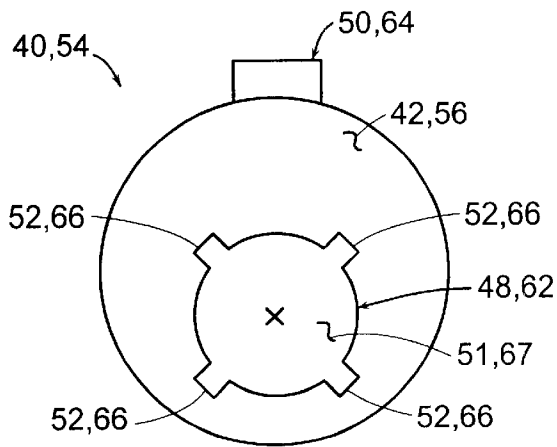


FIG. 5

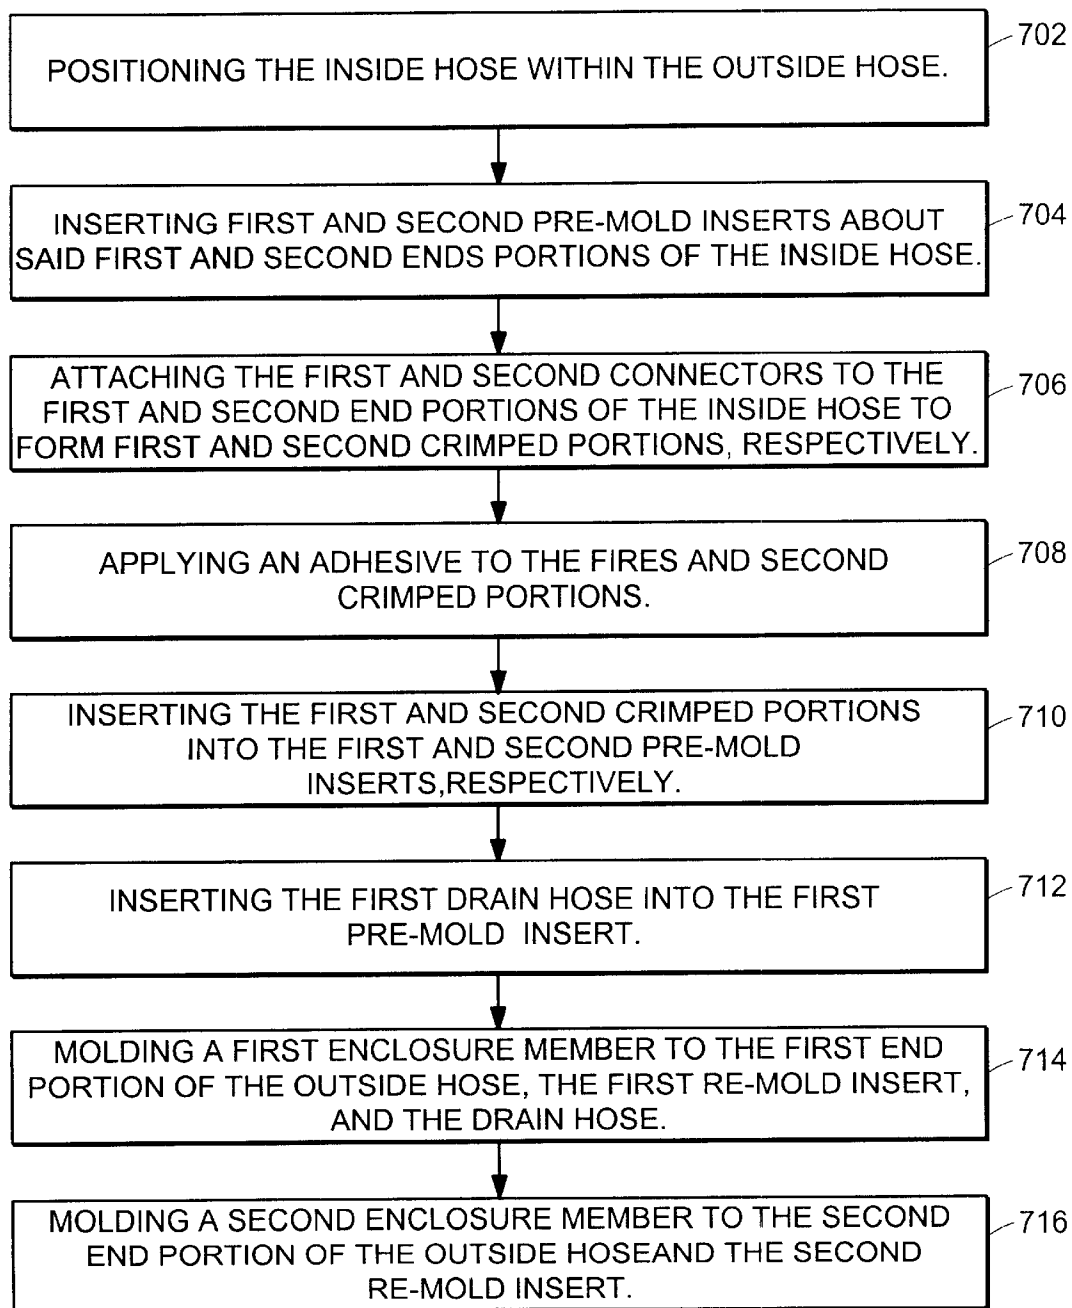


FIG. 7

SAFETY HOSE SYSTEM AND A PROCESS FOR MANUFACTURING THEREOF

BACKGROUND OF THE INVENTION

U.S. Pat. No. 6,039,066 discloses a safety hose system for use with a washer machine to prevent spillage of water resulting from failure of the primary hot water hose. Safety hose systems of the type exemplified by U.S. Pat. No. 6,039,066 are difficult to manufacture at a low cost and while maintaining optimal performance during operation.

OBJECTS OF THE INVENTION

The primary object of the present invention is to provide a reliable and durable safety hose system that is less costly to produce than convention systems.

SUMMARY OF THE PRESENT INVENTION

The present invention is a safety hose system and a process for manufacturing thereof. In one embodiment, the safety hose system comprises an inside hose having first and second end portions and an outside hose having first and second end portions. The safety hose system further comprises a first connector having a first engagement portion and a first tube portion engaged to the first end portion of the inside hose to form a first crimped portion. The safety hose system further comprises a second connector having a second engagement portion and a second tube portion engaged to the second end portion of the inside hose to form a second crimped portion. The safety hose system further comprises a first pre-mold insert having first and second end portions, a cavity portion, a connector inlet portion in communication with the cavity portion, and a drain hose inlet portion in communication with the cavity portion. The safety hose system further comprises a second pre-mold insert having first and second end portions, a cavity portion, and a connector inlet portion in communication with the cavity portion. The safety hose system further comprises a drain hose engaged with drain hose inlet portion of the first pre-mold insert. The safety hose system further comprises a first end-cap member engaged with the first end portion of the outside hose, the first pre-mold insert, and the drain hose. The safety hose system further comprises a second end-cap member engaged with the second end portion of the outside hose and the second pre-mold insert.

One embodiment of a process for manufacturing the safety hose system of the present invention comprises the steps of positioning the inside hose with the outside hose; inserting first and second pre-mold inserts about the first and second end portions of the inside hose; attaching the first and second connectors to the first and second end portions of the inside hose to form first and second crimped portions, respectively; applying an adhesive to the first and second crimped portions; inserting the first and second crimped portions into the connector inlet portions of the first and second pre-mold inserts, respectively; inserting the drain hose into the drain hose inlet portion of the first pre-mold insert; molding a first end-cap member to the first end portion of the outside hose, the first pre-mold insert, and the drain hose; and molding a second end-cap member to the second end portion of the outside hose and the second pre-mold insert.

BRIEF DESCRIPTION OF THE DRAWINGS

The following detailed description of the invention will be better understood with reference to the accompanying drawings in which:

FIG. 1 is a perspective view of a first embodiment of the safety hose system of the present invention;

FIG. 2 is an elevation view of the safety hose system of the present invention;

FIG. 3 is a cross-section view of the safety hose system of the present invention;

FIG. 4 is a top plan view of the pre-mold insert of the present invention;

FIG. 5 is a front elevation view of the pre-mold insert of the present invention;

FIG. 6 is a cross-section view of the pre-mold insert of the present invention; and

FIG. 7 is a flow chart showing a first embodiment of a process for manufacturing the safety hose system of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to FIGS. 1–6, wherein a safety hose system **10** is disclosed. The safety hose system **10** generally comprises a first connector **24** having a first engagement portion **26** and a first tube portion **28** engaged by conventional means to the first end portion **14** of the inside hose **12** to form a first crimped portion **30**. The safety hose system **10** further comprises a second connector **32** having a second engagement portion **34** and a second tube portion **36** engaged by conventional means to the second end portion **16** of the inside hose **12** to form a second crimped portion **38**. The first and second connectors **24** and **32** are each available as Part No. 5-IN38BS, from Swan Corporation of Worthington, Ohio.

The safety hose system **10** further comprises an outside hose **18** having first and second end portions **20** and **22**. The outside hose **18** is available as Part No. 5-3001-6B from Global Med Corporation, Aurora, Ohio.

The safety hose system **10** further comprises a first connector **24** having a first engagement portion **26** and a first tube portion **28** engaged by conventional means to the first end portion **14** of the inside hose **12** to form a first crimped portion **30**. The safety hose system **10** further comprises a second connector **32** having a second engagement portion **34** and a second tube portion **36** engaged by conventional means to the second end portion **16** of the inside hose **12** to form a second crimped portion **38**. The first and second connectors **24** and **32** are each available as Part No. 9-SM8538 from Truex Corporation of Pawtucket, R.I.

The safety hose system **10** further comprises a first pre-mold insert **40** having first and second end portions **42** and **44**, a cavity portion **46**, a connector inlet portion **48** in communication with the cavity portion **46**, and a drain hose inlet portion **50** in communication with the cavity portion **46**. The connector inlet portion **48** comprises an opening **51** and a plurality of channels **52** adapted to receive and engage with the first crimped end portion **30** of the first connector **24**. The safety hose system **10** further comprises a second pre-mold insert **54** having first and second end portions **56** and **58**, a cavity portion **60**, and a connector inlet portion **62** in communication with the cavity portion **60**. The second pre-mold insert **54** may be provided with a drain hose inlet portion (not shown) in communication with the cavity portion **46** to receive a second drain hose **74** (to be described). The connector inlet portion **62** of the second pre-mold insert **54** comprises an opening **67** and a plurality of channels **66** adapted to receive and engage with the second crimped end portion **38** of the second connector **32**. The first and second pre-mold inserts **40** and **54** are made from a thermosetting plastic material and formed by conventional injection molding processes. The thermosetting plastic is available under the brand name Tek Run 4200 by Teknor Apex of Pawtucket, R.I.

The safety hose system **10** further comprises a first drain hose **68** having a first end portion **70** engaged with second

opening **50** of the first pre-mold insert **40**, and a second end portion **72** adapted to engage with a drain pipe (not shown). The safety hose system may comprise a second drain hose **74** identical to the first drain hose **68** but inserted in a different location such as in the second pre-mold insert **54**. The first drain hose **68** is available as Part No. 5-3001-4N from Global Med Corporation of Aurora, Ohio.

The safety hose system **10** further comprises a first end-cap member **76** engaged with the first end portion **20** of the outside hose **18**, the first pre-mold insert **40**, and the first drain hose **68**. The safety hose system **10** further comprises a second end-cap member **78** engaged with the second end portion **22** of the outside hose **18** and the second pre-mold insert **54**. The first and second end-cap members **76** and **78** are made from a thermosetting plastic material and formed by conventional injection molding processes. The thermosetting plastic is available under the brand name Tek Run 4200 by Teknor Apex of Pawtucket, R.I.

Referring to FIG. 7, wherein a process for manufacturing the safety hose **10** is shown. As indicated by block **702**, the process comprises the initial step of positioning the inside hose with the outside hose. As indicated by block **704**, the process further comprises the step of inserting first and second pre-mold inserts about the first and second ends portions of the inside hose. As indicated by block **706**, the process further comprises the step of attaching the first and second female connectors to the first and second end portions of the inside hose to form first and second crimped portions, respectively. As indicated by block **708**, the process further comprises the step of applying an adhesive to the first and second crimped portions. In one embodiment, the adhesive used is available as Part No. DP-8005 from 3M of Saint Paul, Minn. As indicated by block **710**, the process further comprises the step of inserting the first and second crimped portions into the first and second pre-mold inserts, respectively. As indicated by block **712**, the process further comprises the step of inserting the drain hose into the first pre-mold insert. As indicated by block **174**, the process further comprises the step of molding a first end-cap member to the first end portion of the outside hose, the first pre-mold insert, and the drain hose. As indicated by block **176**, the process further comprises the step of molding a second endcap member to the second end portion of the outside hose and the second pre-mold insert.

As described hereto fore, the first and second pre-mold inserts **40** and **54** and the first and second end-cap members **76** and **78** are made from a thermosetting plastic material and formed by conventional injection molding processes and machines. The thermosetting plastic is available under the brand name Tek Run 4200 by Teknor Apex of Pawtucket, R.I. In one process, the first and second pre-mold inserts **40** and **54** and first and second end-cap members **76** and **78** may be molded using a 3.5 ton hydraulic mechanical and vertical molding machine available as Part No. WDHS-35-S1 from Autojector Corporation of P.O. Box 709, Auillay, Ind., 46170, and at a temperature of 420 Fahrenheit at thirty (30) second cycles.

Features List: (To Be Deleted Prior to Issuance of Patent)

- 10** safety hose system
- 12** inside hose
- 14** first end portion
- 16** second end portion
- 18** outside hose
- 20** first end portion
- 22** second end portion
- 24** first connector
- 26** first engagement portion

- first tube portion
- 30** first crimped portion
- 32** second connector
- 34** second engagement portion
- 5 second tube portion
- 38** second crimped portion
- 40** first pre-mold insert
- 42** first end portion
- 44** second end portion
- 10 **46** cavity portion
- 48** connector inlet portion
- 50** drain hose inlet portion
- 51** opening
- 52** channels
- 15 **54** second pre-mold insert
- 56** first end portion
- 58** second end portion
- 60** cavity portion
- 62** connector inlet portion
- 20 **64** drain hose inlet portion
- 66** channels
- 67** opening
- 68** first drain hose
- 70** first end portion
- 25 **72** second end portion
- 74** second drain hose
- 76** first end-cap member
- 78** second end-cap member

The foregoing description is intended for purposes of illustration. The invention may be embodied in other forms or carried out in other ways without departing from the spirit or scope of the invention. Modifications and variations still falling within the spirit or the scope of the invention will be readily apparent to those of skill in the art.

What is claimed is:

1. A safety hose system comprising an inside hose having first and second end portions; first and second connector members engaged to said first end and second portions of said inside hose; an outside hose having first and second end portions; first and second pre-mold inserts each having a cavity portion, said cavity portion having substantially open first and second end portions, said first pre-mold insert further comprises a drain outlet opening in communication with said cavity portion; said cavity portion of said first pre-mold insert being spaced and in communication with said cavity portion of said second pre-mold insert; said first and second end portions of said outside hose being engaged with said first and second pre-mold inserts, respectively; said inside hose passing thru said first and second open end portions of said first and second pre-mold inserts; a drain hose member engaged with said drain outlet opening of said first pre-mold insert; a first end-cap member engaged with said first end portion of said outside hose and said first pre-mold insert and said first connector member; and a second end-cap member engaged with said second end portion of said outside hose and said second pre-mold insert and said second connector member.

2. The device of claim **1**, wherein said cavity portion of said first and second pre-mold insert are cylindrically shaped.

3. The device of claim **2**, wherein said first and second pre-mold inserts are each substantially rigid.

4. The device of claim **3**, wherein said first and second pre-mold inserts are each made from a thermosetting material.

5. The device of claim **3**, wherein said first and second end-cap members are molded and are substantially rigid.

5

6. The device of claim **5**, wherein said first and second end-cap members are made from a thermosetting material.

7. The device of claim **5**, wherein said drain outlet opening of said cavity portion is shaped in the form of a cylindrical channel disposed perpendicular to said first and second open end portions of said cavity portion. 5

8. The device of claim **7**, wherein said first and second connector members each comprise an engagement portion and a tubular portion.

9. The device of claim **8**, wherein said first and second end portions of said inside hose are connected to said tubular portion of said first and second connector members, respectively, to form crimped portions. 10

6

10. The device of claim **9**, wherein said first and second pre-mold inserts each comprise a plurality of recesses formed about the first open end portion of said first and second pre-mold inserts, respectively, adapted to receive said crimped portions of said first and second connector members.

11. The device of claim **10**, wherein said first and end-cap member are engaged and molded with said tubular portions of said first and second connector members, respectively.

* * * * *